



SRK100VNAWPZSX

10.0 (4.0 ~ 11.2)

Indoor Unit : SRK50ZSX-W x 2

Outdoor Unit : FDC100VNA-W

Specifications

R32

Indoor unit		SRK50ZSX-W x 2	
Outdoor unit		FDC100VNA-W	
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz	
Nominal cooling capacity (Min-Max)		kW	10.0 (4.0 ~ 11.2)
Nominal heating capacity (Min-Max)		kW	11.2 (4.0 ~ 12.5)
Power Consumption		Cooling/Heating kW	2.89 / 2.61
EER/COP		Cooling/Heating kW	3.46 / 4.29
Inrush current		A	5
Max. current		A	24
Sound power level* ¹	Indoor* ³	Cooling/Heating	dB(A) 59 / 62
	Outdoor	Sound power level	dB(A) 69 / 70
Sound pressure level* ¹	Indoor* ³	Cooling (P-Hi/Hi/Me/Lo)	dB(A) 44 / 39 / 31 / 22
	Indoor	Heating (P-Hi/Hi/Me/Lo)	dB(A) 46 / 41 / 33 / 23
	Outdoor	Cooling/Heating	dB(A) 54 / 55
Air flow	Indoor* ³	Cooling (P-Hi/Hi/Me/Lo)	m ³ /min 14.3 / 12.4 / 7.8 / 5.4
	Indoor	Heating (P-Hi/Hi/Me/Lo)	m ³ /min 17.3 / 14.3 / 9.8 / 6.2
	Outdoor	Cooling/Heating	m ³ /min 75 / 73
Exterior dimensions	Indoor	HeightxWidthxDepth	mm 305 x 920 x 220
	Outdoor		mm 845 x 970 x 370
Net weight		Indoor/Outdoor	kg 13 / 77
Refrigerant charge		kg/TCO ₂ E _q	3.3/2.228
Refrigerant Type GWP			R32/675
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")
Refrigerant line (one way) length		m	Max.50
Vertical height differences		Outdoor is higher/lower	m Max.50 / Max.15
Outdoor operating temperature range		Cooling* ²	°C -15~50
		Heating	°C -20~20
Air filter, Q'ty			Polypropylene net x 2(washable)
Remote control (option)			wired:RC-EX3A, RC-E5, RCH-E3 & Interface kit:SC-BIKN2-E
Energy Class (Cooling/Heating)			A+ +/A+
SEER			7.05
SCOP (Average climate)			4.47
Pdesign (cooling/heating@-10°C)			10.0/8.5
Annual Electricity Consumption			497/2661
Designated Heating Season			Average

The data is measured under the following conditions(ISO-T1).

Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

*1: Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions


*2: If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind, if wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down

*3: The values are for one indoor unit operation. (Multi system only)

Schematics

Unit: mm

Models SRK50ZSX-W, 60ZSX-W

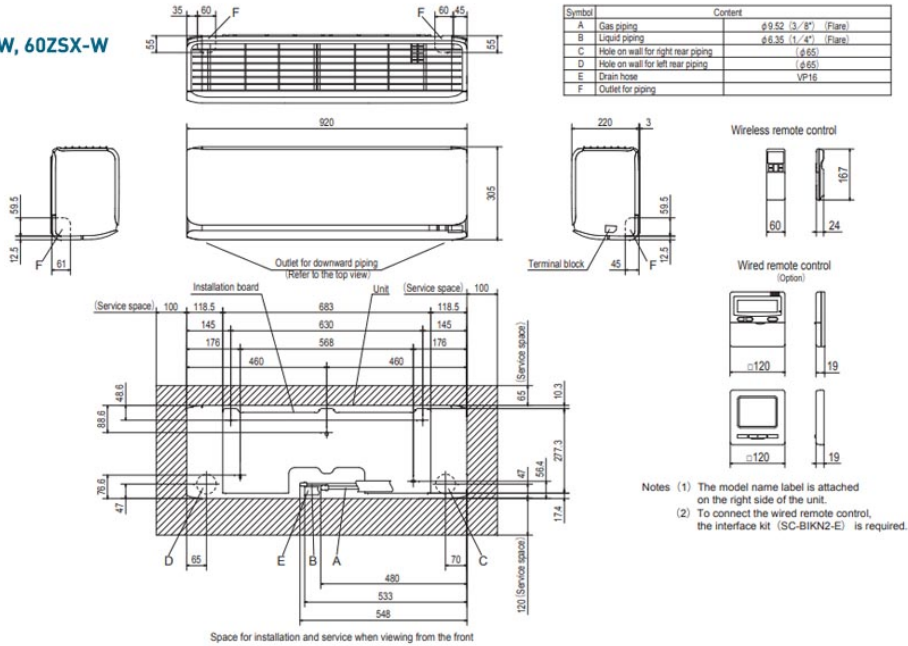

Unit: mm

Model FDC100VNA-W, 125VNA-W, 140VNA-W, 100VSA-W, 125VSA-W, 140VSA-W

