MITSUBISHI HEAVY INDUSTRIES
AIR CONDITIONING EUROPE

SKM20ZSP-W

2.0kW

Specifications

Nominal cooling capacity		kW	2.0
Nominal heating capacity		kW	3.0
Sound power level	Cooling	dB(A)	57
	Heating	dB(A)	56
Sound pressure level	Cooling(Hi/Me/Lo/Ulo)	dB(A)	42 / 35 / 22
	Heating(Hi/Me/Lo/Ulo)	dB(A)	41 / 36 / 26
Air flow	Cooling(Hi/Me/Lo/Ulo)	m^3/min	8.5 / 7.0 / 5.0
	Heating(Hi/Me/Lo/Ulo)	m^3/min	8.0 / 7.0 / 5.5
Exterior dimensions (H×W×D)		mm	267×783×210
Net weight		kg	7.5
Refrigerant piping size	Liquid / Gas	mm (ø inch)	6.35(1/4")/9.52(3/8")
Clean filter			-

• The data is measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
• Sound level the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

Because of our policy of continuous improvement, we reserve the right to make changes in all specifications without notice.

Schematics

Unit: mm

Models SKM20ZSP-W, 25ZSP-W, 35ZSP-W

Symbol	Content	
A	Gas piping	ϕ9.52 (3/8") (Flare)
B	Liquid piping	ϕ6.35 (1/4") (Flare)
C	Hole on wall for right rear piping	(ϕ65)
D	Hole on wall for left rear piping	(ϕ65)
E	Drain hose	VP16
F	Outlet for wiring	
G	Outlet for piping (on both side)	

Wireless remote control



Note (1) The model name label is attached on the underside of the indoor unit.

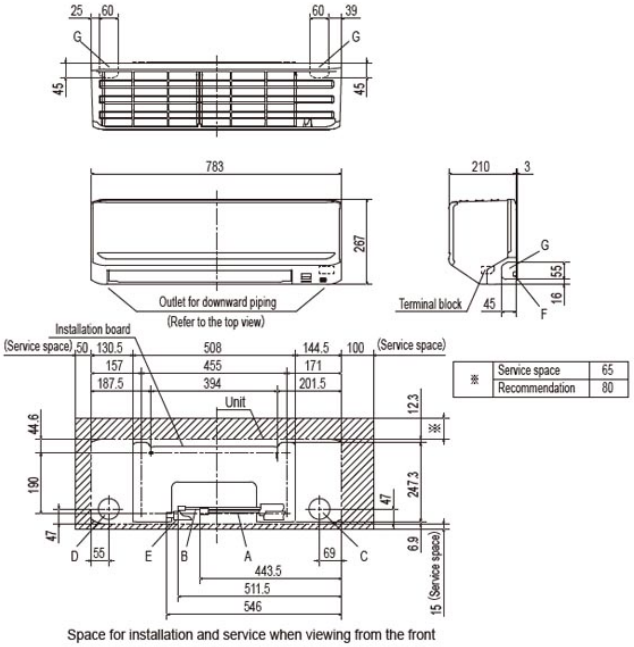

※	Service space	65
	Recommendation	80

Space for installation and service when viewing from the front