



SRK71ZR-W

7.1kW





Specifications

Nominal cooling capacity		kW	7.1
Nominal heating capacity		kW	8.0
Sound power level	Cooling	dB(A)	57
	Heating	dB(A)	60
Sound pressure level	Cooling(Hi/Me/Lo/Ulo)	dB(A)	44 / 41 / 37 / 25
	Heating(Hi/Me/Lo/Ulo)	dB(A)	46 / 39 / 35 / 28
Air flow	Cooling(Hi/Me/Lo/Ulo)	m ³ /min	20.5 / 18.6 / 16.2 / 10.4
	Heating(Hi/Me/Lo/Ulo)	m ³ /min	25.0 / 19.8 / 17.3 / 13.3
Exterior dimensions (H×W×D)		mm	339×1197×262
Net weight		kg	15.5
Refrigerant piping size	Liquid / Gas	mm ø	6.35 (1/4") / 15.88 (5/8")
Clean filter			Allergen Clear Filter x1, Photocatalytic Washable Deodorizing Filterx1

- The data is measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
- Sound level the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

Schematics

**SRK63ZR-W SRK71ZR-W SRK80ZR-W
SRK63ZR-S SRK71ZR-S SRK80ZR-S SRK100ZR-S**

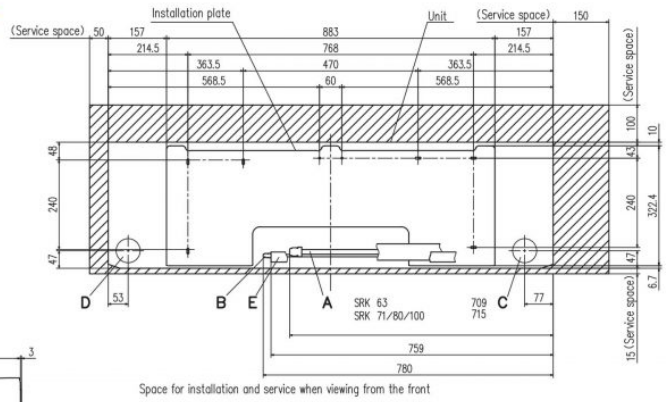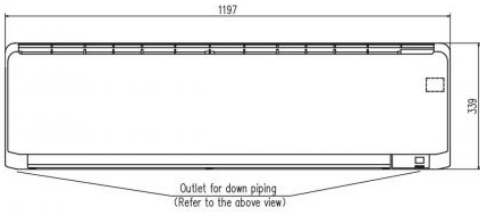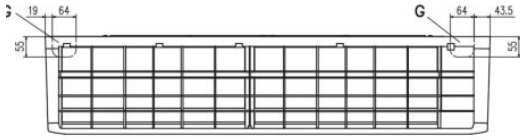

Symbol	Content		
A	Gas piping	SRK 63	#12.7 (1/2") (Flare)
		SRK 71,80,100	#15.88 (5/8") (Flare)
B	Liquid piping	SRK 63,71,80	#6.35 (1/4") (Flare)
		SRK 100	#9.52 (3/8") (Flare)
C	Hole on wall for right rear piping		(ø65)
D	Hole on wall for left rear piping		(ø65)
E	Drain hose		VP16
F	Outlet for wiring (on both side)		
G	Outlet for piping (on both side)		