MITSUBISHI HEAVY INDUSTRIES
AIR CONDITIONING EUROPE

FDC224KXZWE1

22.4kW

Specifications

Nominal horse power				8HP
Power source				3 Phase 380-415V, 50Hz
Nominal capacity	Cooling		kW	22.4
	Heating			25.0
Power Consumption		Cooling	kW	4.23
		Heating		4.24
EER	Cooling			5.3
COP	Heating			5.9
Exterior dimensions	HxWxD		mm	1100x780x550
Sound pressure level	Cooling/Heating		dB(A)	48
Net Weight			kg	185

The data is based on the rating condition:
Cooling: Indoor temp. of 27 °C DB,19 °C WB, and heat source unit inlet water temp. of 30 °C, water flow rate 96 L/min
Heating: Indoor temp. of 20 °C DB,15 °C WB, and heat source unit inlet water temp. of 20 °C, water flow rate 96 L/min

Because of our policy of continuous improvement, we reserve the right to make changes in all specifications without notice.

Schematics

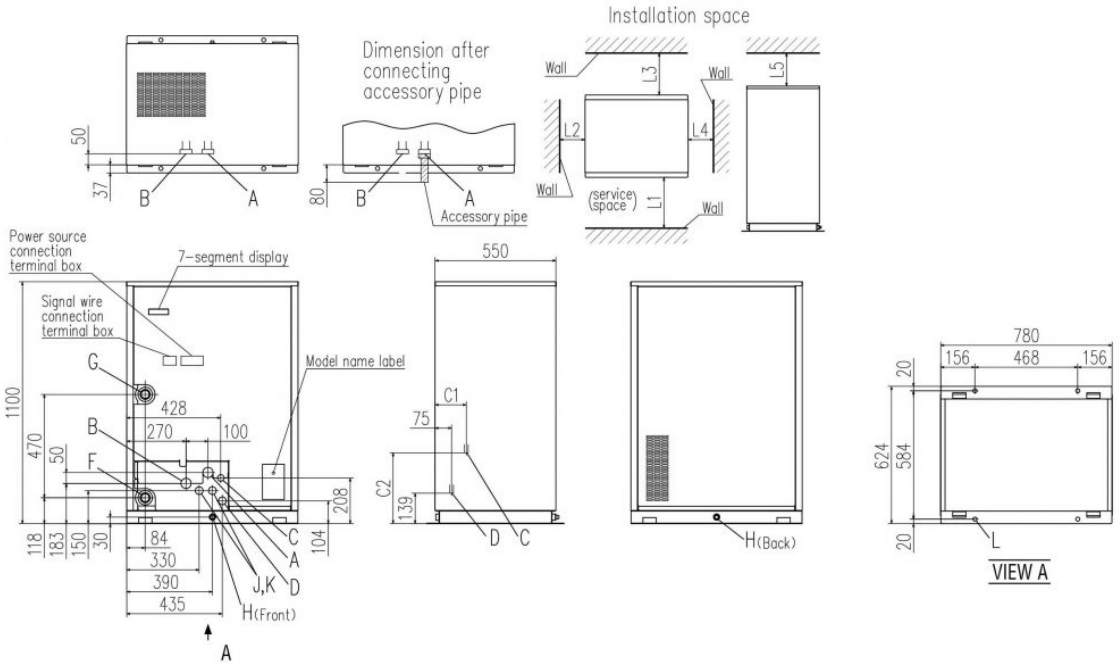
Installation space
Dimension after connecting accessory pipe
Wall
L3
L5
L2
L4
(service) space
L1
Accessory pipe
Power source connection terminal box
7-segment display
Signal wire connection terminal box
Model name label
550
780
156
468
156
1100
470
428
270
100
208
118
183
150
30
84
330
390
435
104
75
C1
C2
139
H(Back)
H(Front)
624
584
20
VIEW A